

EMSHIELD WFR2

Vertical Applications

Watertight by design®

Patent Pending



NEW

Watertight, Energy-Efficient 2-hour Fire-Rated Wall Expansion Joint

EMSHIELD WFR2 is a patent-pending single unit fire-rated expansion joint which provides water protection, sound attenuation, thermal insulation, color coordination, and accommodates structural joint movement. WFR2 (Wall, Fire-Rated 2-Hours) continues the line of breakthrough, multi-function, structural expansion joint materials being released by EMSEAL. WFR2 has been tested and certified by Underwriters Laboratories (UL) to the rigors of ULC and UL 2079.

Fire-retardant impregnated foam is factory pre-coated on both faces with an intumescent fire-proofing material. It is then coated again on both faces with a waterproof silicone coating which is available in choice of colors for each side.

EMSHIELD WFR2 provides a watertight, clean handling, UV stable, non-staining, low-temperature-flexible, high-temperature-stable, watertight, energy-efficient, sound attenuating and fire-rated joint seal in a single installation process. WFR2 is ideal for exterior and interior structural joints where a fire-rating is required or desired.

Movement of $\pm 25\%$ (50% total)

EMSHIELD WFR2 Sizing

Joint Size at Mean T°F	Depth of Seal
Inches (mm)	Inches (mm)
1 (25)	4 (100)
1 1/4 (30)	4 (100)
1 1/2 (40)	4 (100)
1 3/4 (45)	4 (100)
2 (50)	4 (100)
3 (75)	4 (100)
4 (100)	4 (100)
5 (125)	4 (100)
6 (150)	4 (100)

WFR2 sizes are available in 1/4" increments of nominal sizes from 1" to 6". Nominal size is equivalent to joint gap size at mean temperature.




Now Available
**EMSHIELD WFR2
UNIVERSAL-90's**
Factory-Fabricated
Transitions & Terminations

EMSHIELD WFR2

Water / Fire / Energy / Movement

EMSHIELD WFR2

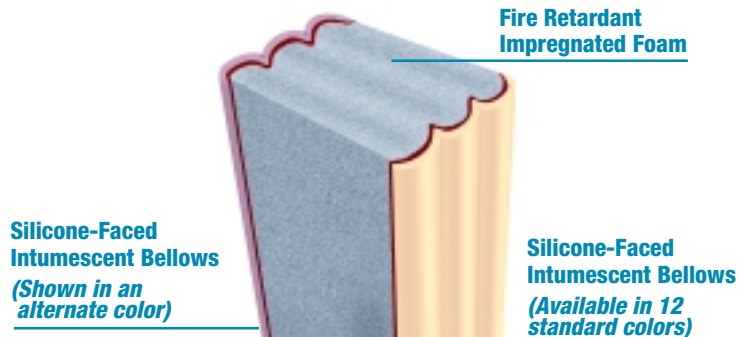

One Install Does It All

Standard CAD details are available online at www.emseal.com. For application specific CAD details contact EMSEAL directly.

EMSEAL JOINT SYSTEMS, LTD 25 Bridle Lane, Westborough, MA 01581
EMSEAL, LLC 120 Carrier Drive, Toronto, ON, Canada M9W 5R1

Toll Free
800-526-8365

PH: 508.836.0280
PH: 416.740.2090

FX: 508.836.0281
FX: 416.740.0233

